





PRODUCT CATALOGUE

April 2023

MANUFACTURER

**SOLAR PANELS | SOLAR LIGHTS | LED LIGHTS
RENEWABLE PRODUCTS | SOLAR SYSTEM | ON GRID,
OFF GRID**

PRODUCT RANGE

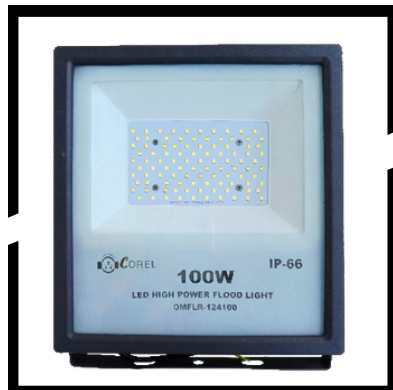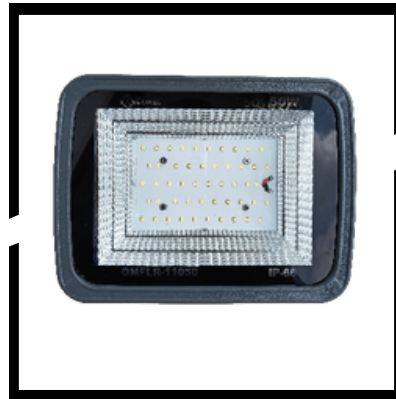



FLOOD LIGHT



TECHNICAL SPECIFICATION

• HOUSING	Aluminium Die Cast With Powder Coated
• HOUSING FINISH	Black/Grey
• RATED LUMENS	160 Lm/W
• CONTROL GEAR	IP 66, 440V, OVP, UVP
• IP RATING	IP-66, IK-07
• CRI	>70
• SURGE PROTECTION	4 KV / As Per Required
• POWER FACTOR	>0.95
• INPUT VOLTAGE	85-285 V AC
• SYSTEM EFFICIENCY	(LM/W) >130
• COLOUR AVAILABLE	White/Warm White
• LED LIFE SPAN	50000 Hours
• LED BEAM ANGLE	120 Degree
• ELECTRICAL EFFICIENCY	>90%
• THERMAL EFFICIENCY	>90%

MODEL- DOWN CHOWK FLOOD LIGHT (SILVER REFLECTOR)

Wattage	20W	30W	50W	100W	150W	200W	320W
Model Number	FLR-10120	FLR-10230	FLR-10350	FLR-104100	FLR-105150	FLR-106200	FLR-107320
Standard Packing							



FLOOD LIGHT



TECHNICAL SPECIFICATION

• HOUSING	Aluminium Die Cast With Powder Coated
• HOUSING FINISH	Black/Grey
• RATED LUMENS	160 Lm/W
• CONTROL GEAR	IP 66, 440V, OVP, UVP
• IP RATING	IP-66, IK-07
• CRI	>70
• SURGE PROTECTION	4 KV / As Per Required
• POWER FACTOR	>0.95
• INPUT VOLTAGE	85-285 V AC
• SYSTEM EFFICIENCY	(LM/W) >130
• COLOUR AVAILABLE	White/Warm White
• LED LIFE SPAN	50000 Hours
• LED BEAM ANGLE	120 Degree
• ELECTRICAL EFFICIENCY	>90%
• THERMAL EFFICIENCY	>90%



MODEL- DELUX FLOOD LIGHT

Wattage	20W	30W	50W	100W	150W	225W
Model Number	FLR-11720	FLR-11830	FLR-11950	FLR-120100	FLR-121150	FLR-1122200
Standard Packing						



FLOOD LIGHT



TECHNICAL SPECIFICATION

• HOUSING	Aluminium Die Cast With Powder Coated
• HOUSING FINISH	Black/Grey
• RATED LUMENS	160 Lm/W
• CONTROL GEAR	IP 66, 440V, OVP, UVP
• IP RATING	IP-66, IK-07
• CRI	>70
• SURGE PROTECTION	4 KV / to 10 KV As Per Required
• POWER FACTOR	>0.95
• INPUT VOLTAGE	85-285 V AC
• SYSTEM EFFICIENCY	(LM/W) >130
• COLOUR AVAILABLE	White/Warm White
• LED LIFE SPAN	50000 Hours
• LED BEAM ANGLE	120 Degree
• ELECTRICAL EFFICIENCY	>90%
• THERMAL EFFICIENCY	>90%

MODEL - SQUARE FLOOD LIGHT (SILVER REFLECTOR)

Wattage	50W	100W	150W	200W	300W	400W
Model Number	FLR-12350	FLR-124100	FLR-125150	FLR-126200	FLR-127300	FLR-128400
Standard Packing						



FLOOD LIGHT



TECHNICAL SPECIFICATION

• HOUSING	Aluminium Die Cast With Powder Coated
• HOUSING FINISH	Black/Grey
• RATED LUMENS	160 Lm/W
• CONTROL GEAR	IP 66, 440V, OVP, UVP
• IP RATING	IP-66, IK-07
• CRI	>70
• SURGE PROTECTION	4 KV / to 10 KV As Per Required
• POWER FACTOR	>0.95
• INPUT VOLTAGE	85-285 V AC
• SYSTEM EFFICIENCY	(LM/W) >130
• COLOUR AVAILABLE	White/Warm White
• LED LIFE SPAN	50000 Hours
• LED BEAM ANGLE	120 Degree
• ELECTRICAL EFFICIENCY	>90%
• THERMAL EFFICIENCY	>90%

MODEL - LENS FLOOD LIGHT

Wattage	30W	50W	100W	150W	200W
Model Number	FLR-12930	FLR- 13050 14050	FLR- 131100 141100	FLR-132150	FLR-127300
Standard Packing					

